

Qadvanced Intelligent System (QIS)


Installation Instructions for RJ45 Modular Plug on CAT5e Cable

1




Cut cable to the desired length. Remove the outer jacket of the cable using stripping tool. Place the tool approximately 1.25" from the end of the cable. Rotate the tool at least twice around the cable, both clockwise and counter-clockwise. That will score the jacket allowing you to remove it without damaging the conductors inside.

2

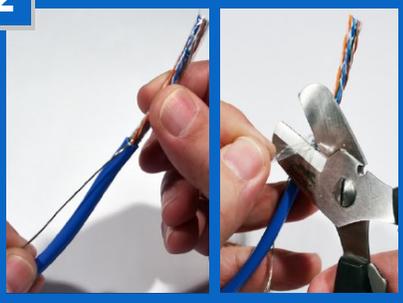

For applications using shielded cable - Pull the wire braid over the outer jacket and trim off the clear plastic jacket.


3

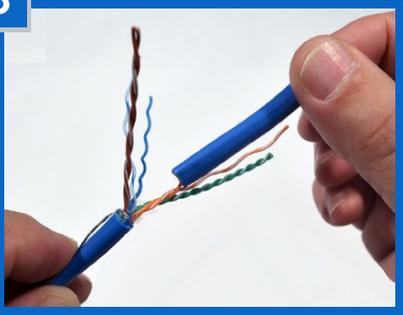

Untwist and separate all of the conductor pairs.


TIP: Use the jacket that was just removed and feed each conductor down the jacket to untwist it.

4

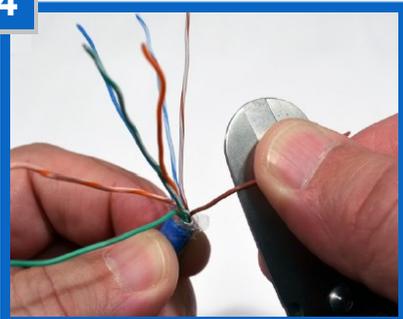

Use the outer edge of the cable scissors to straighten conductors. Using gentle pressure (to avoid damage to the conductors), put each conductor between thumb and edge of cutter and pull up from outer jacket to end of the conductor.

5

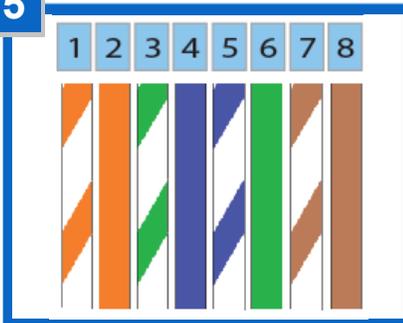

Arrange the conductors in the order shown:

Note: Wiring instructions for T568B method

1. White/Orange
2. Orange
3. White/Green
4. Blue
5. White/Blue
6. Green
7. White/Brown
8. Brown



Qmotion[®]
advanced shading systems




For more information visit
us at qmotionshades.com
or call 877.849.6070

© 2016 QMotion, Incorporated. QMotion is a trademark of QMotion Incorporated. All rights reserved.

Qadvanced Intelligent System (QIS)


Installation Instructions for RJ45 Modular Plug on CAT5e Cable

6

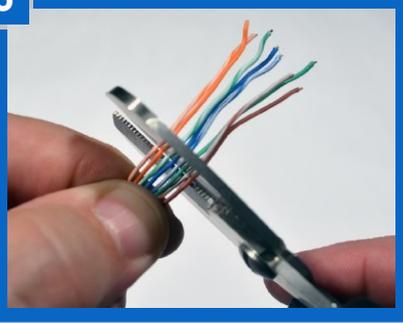

Bring the sorted conductors together, holding tightly between the thumb and forefinger. Check to ensure the wiring sequence is correct. Cut the wires at a 90° angle about 1/2" from the end of the jacket.

7

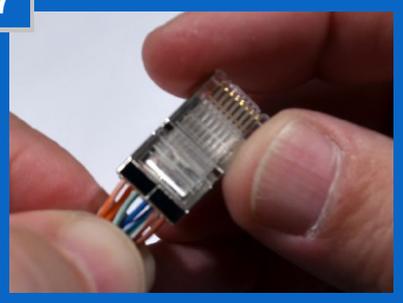

Insert the conductors into the plug. Hold the plug with the copper contacts facing up and the locking tab facing down. In this position, the orange/white conductor should be the first conductor on the left. Insert the conductors into the plug. For shielded cable applications - Make sure the drain wire is wrapped around the jacket underneath the back of the plug prior to crimping in order to complete the ground.

8



Crimp the plug using the crimp tool. Place the plug into the crimp tool and squeeze handles tightly. The copper splicing tabs on the plug will pierce into each of the eight conductors. The locking tab will cinch onto the outer jacket of the cable.

9



Remove the plug from tool. Check the conductor sequence and ensure outer jacket is inside the plug and secured by the locking tab. For shielded cable applications - trim the excess drain wire just below entry into plug.

10



Repeat Steps for other end of cable. Use a cable tester to ensure proper installation and wiring of plugs.



Qmotion[®]
advanced shading systems



For more information visit
us at qmotionshades.com
or call 877.849.6070

© 2016 QMotion, Incorporated. QMotion is a trademark of QMotion Incorporated. All rights reserved.